



ANTIFOULING BOTTOM PAINT

PRODUCT & COLOR GUIDE

PEACE OF MIND PROTECTION
YOU CAN TRUST.

TRINIDAD® HARD ANTIFOULING

TRINIDAD products have a proven track record of dependable antifouling performance. The active ingredient leaches out while the paint film stays mostly intact.

Trinidad products do not require movement and work equally well at the dock and underway. Trinidad harnesses the power of an extremely high load of biocides to combat even the most extreme fouling conditions.



Trinidad® PRO - the standard by which all bottom paints are measured. It remains the longest lasting, strongest antifouling paint available. Trinidad PRO provides unprecedented resistance to all fouling. Its hard protective coating has excellent adhesion, and withstands the toughest abuse. Left in the water, it will provide years of dependable service.



BLUE - 1082FD



GREEN - 1083FD



RED - 1086FD



BLACK - 1088FD



Trinidad® 75 - with a proven track record of dependable antifouling performance, Trinidad 75 has earned its reputation as one of the most respected names in the industry. Trinidad 75 harnesses the power of an extremely high load of cuprous oxide, to combat even the most extreme fouling conditions. Trinidad 75's durable, hard epoxy finish has excellent adhesion, and when left in the water, will provide years of dependable service. The antifoulant of choice for professional applicators everywhere.



BLUE - 1074FD



GREEN - 1073FD



RED - 1076FD



SPECIAL BLACK - 1079FD



Trinidad® HD provides excellent, long lasting protection, even under the toughest antifouling conditions. Trinidad HD provides dependable in-water antifouling protection while meeting the 330 gram per liter VOC regulations. Trinidad HD does not require movement and works equally as well at the dock or underway. It's durable hard modified epoxy finish has excellent adhesion, and is highly abrasion resistant.

A good choice for powerboat or sailboat use in tropical and other warm waters where extreme fouling exists.



BLUE - 1271



GREEN - 1371



RED - 1671



BLACK - 1871



PEACE OF MIND PROTECTION... YOU CAN TRUST!

PETTIT PAINT'S HD (HULL DEFENSE) LIMITED WARRANTY IS THE INDUSTRY'S LEADING WARRANTY.

For more information visit www.pettitpaint.com/HD

ODYSSEY® MULTI-SEASON ABLATIVE ANTIFOULING

ODYSSEY Solvent-Based Antifouling Paints wear away with use, exposing new biocides.

Both the biocides and the paint film disappear over time. These paints can be used multi-season and maintain a more steady performance throughout their useful life. These paints require movement of the boat in order to work. Works similar to a bar of soap by polishing away with use.



Odyssey® Triton - delivers exceptional, multi-season, tri-biocide performance by combining the proven reliability of Copper Thiocyanate, the impressive strength of ECONEA®, and the versatile organic boosting biocide Zinc Omadine. This combination makes Odyssey Triton effective against all types of fouling found in the harshest of marine environments.



BLUE - 1299




GREEN - 1399



RED - 1699



BLACK - 1899



WHITE - 1199



Odyssey® 60 - delivers exceptional, multi-season, performance against fouling by offering the highest copper content in an ablative available. With significantly more copper than many competitors', Odyssey 60 offers stronger protection at a better value. Fast dry technology provides quick turnaround and increased production for all applicators.



BLUE - 1265



GREEN - 1365



RED - 1665



BLACK - 1865



Odyssey® HD - multi-season antifouling combines controlled polishing ablative technology with a high copper content to provide a paint film strong enough to handle the tough marine environment from coast to coast. Odyssey HD is compatible over most finishes and will not build up over time, leaving running surfaces smooth and clean. Odyssey HD's copolymer resins withstand hauling and relaunching without losing effectiveness for both power and sailboats.



DARK BLUE - 1227



BLUE - 1207



GREEN - 1307



RED - 1607



BLACK - 1807



ODYSSEY TRITON



TRINIDAD PRO
TRINIDAD 75
TRINIDAD HD

ODYSSEY 60
ODYSSEY HD

UNDERWATER METAL PROTECTION



Running Gear Guardian™ is designed to prevent fouling on all underwater metal running gear such as propellers, trim tabs, propeller shafts and rudder, prop struts, sail drives, strainers, bow and stern thrusters and other underwater metal or running gear by providing incredibly effective and long lasting protection. Even low levels of fouling on running surfaces can cause efficiency losses up to 20% for any boat.



BLACK - 1870

PROPELLER & SHAFT



Prop Coat Barnacle Barrier® 1792 provides protection for bare metals including steel, stainless steel, cast iron, copper, bronze, galvanized steel, and lead. It forms an excellent bond to underwater metals and running gear, and inhibits corrosion on these surfaces. Prop Coat Barnacle Barrier's smooth, hard surface will self-clean in service, and can be used above or below the waterline. The dried film of Prop Coat contains the highest percentage of pure Zinc.

FOR MORE INFORMATION
800-221-4466 | WWW.PETTITPAINT.COM

HYDROCOAT® TECHNOLOGY ANTIFOULING

HYDROCOAT Water-Based Ablative Paints have fewer VOC's, no foul smell and clean-up is simple with soap and water.

Yet with all this green going for it, Hydrocoat is a very effective antifouling and is as good as the best solvent-based bottom paints. Hydrocoat can be applied over any other bottom paint without any preparation. Hydrocoat makes everything easier, from painting, to clean-up, to breathing.



Hydrocoat® offers excellent multi-season protection against all types of fouling. Its innovative technology replaces the harsh solvents found in most bottom paints with water, resulting in an easier application and clean-up, with no heavy solvent smell. Hydrocoat's ablative surface wears away with use, exposing fresh biocide while eliminating paint build-up and the need for sanding. Its unlimited dry time to launch allows for painting in the fall.




BLUE - 1240



GREEN - 1340



RED - 1640



BLACK - 1840



Hydrocoat® ECO Self-polishing, water-based ablative technology with organic ECONEA® biocide. Hydrocoat Eco utilizes the highest level of new metal-free ECONEA biocide available combine with a slime fighting inhibitor for unprecedented multi-season protection. This copper-free formula is compatible over almost all bottom paints and is safe for use on all substrates including steel and aluminum.



BLUE - 1204




GREEN - 1304



RED - 1604



BLACK - 1804



WHITE - 1104

ANTIFOULING SPEED COATING

Self-polishing surface that resists build-up and can be burnished to a porcelain-like racing finish. These paints provide highly effective, dual-biocide, multi-season protection against aggressive fouling and slime.



Black Widow® is the slickest, fastest, ultra-smooth burnishable racing finish available. Black Widow is easily burnish-able to a metallic "gun-metal" shine. Black Widow makes an excellent paint for the bottom of any boat where speed is the number one priority, including racing sailboats, and high performance offshore powerboats.



DARK BLUE - 1269




BLACK - 1869

Black Widow contains four strong slickening agents: Molybdenum Disulfide, PTFE, Graphite and Silicon.



Vivid® offers the brightest colors, the blackest black and the whitest white available. Hybrid technology incorporates all the benefits of ablative and hard paints in one. Its hard, smooth surface withstands trailering and is easily burnished to a high performance racing finish. Vivid resists build-up and can be hauled and relaunched without repainting. Safe for use on properly primed aluminum.

VIVID BASE COLORS



WHITE - 1161



YELLOW - 1461



BLUE - 1261



RED - 1661



GREEN - 1361



BLACK - 1861


VIVID MIXED COLORS



4 WHITE / 1 YELLOW




1 RED / 1 YELLOW



1 WHITE / 1 YELLOW



4 YELLOW / 1 RED



4 YELLOW / 1 WHITE



1 RED / 1 WHITE

HRT® - HYBRID REACTIVE TECHNOLOGY

HRT - Hybrid Reactive Technology features high density biocide utilization to maximize effectiveness by using biocide more effectively along with film modifiers to reduce yearly build-up, maintain uniform color consistency, and lower weight while providing a smoother finish than traditional paints. These film modifiers also increase coverage by 25% and continues working whether the vessel is stationary or in motion.



Premium HRT® multi-season high copper antifouling uses the latest technology available to create a hybrid paint film strong enough to handle the tough marine environment without building up over time. Equally effective on both power and sailboats, Premium HRT provides excellent antifouling protection without the costs associated with high end antifoulants. Its ease of use, impressive coverage, and attractive price tag make it an excellent choice for use as a boatyard's "house paint".




BLUE - 1219



GREEN - 1319



RED - 1619



BLACK - 1819



ECO HRT® copper-free antifouling uses the latest technology available to create a hybrid paint film strong enough to handle the tough marine environment without building up over time. ECO HRT smooth durable paint surface wears away over time, eliminating paint film build-up and the need for sanding. This copper-free formula can be safely applied to all aluminum-hulled boats. It provides excellent antifouling protection and can be hauled and re-launched without any loss of effectiveness.



BLUE - 1200



BLACK - 1800



GRAY - 1300



Neptune HRT® water-based antifouling uses the latest technology available to create a hybrid paint film strong enough to handle the tough marine environment. Soap and water clean-up along with no strong solvent smell, yields a user-friendly application. Neptune HRT does not require sanding between coats saving time and money. With low VOC it's ideal for marinas under restrictions. Neptune HRT can be used over all previously painted surfaces.



BLUE - 1243



GREEN - 1343



RED - 1643



BLACK - 1843



Unepoxy HRT® seasonal antifouling uses the latest technology available to create a hybrid paint film strong enough to handle the tough marine environment without building up over time. It is a dependable antifouling paint formulated to provide outstanding protection at a very affordable price. Its smooth durable finish is able to withstand beaching, trailering, and season long abuse.



BLUE - 1211



GREEN - 1311



RED - 1611



BLACK - 1811

1 RED / 4 WHITE	4 BLUE / 1 YELLOW	1 BLUE / 4 WHITE	1 BLUE / 4 RED
4 YELLOW / 1 BLUE	4 GREEN / 1 YELLOW	4 BLUE / 1 RED	4 WHITE / 1 BLACK
1 YELLOW / 1 BLUE	1 GREEN / 1 WHITE	1 BLUE / 1 RED	1 BLACK / 1 WHITE

EPOXY PRIMER BARRIER COAT

NEW FRUSTRATION FREE PACKAGING



Pettit Protect® is a heavy duty, two component, epoxy coating for use where maximum resistance to fresh or salt water is required. It reduces water absorption making it an excellent choice for osmotic blister prevention and repair. Its high-solids formula allows for quicker and easier application with fewer coats necessary for effective protection. It also offers dependable corrosion protection on all underwater metals.



GRAY 4700/4701



WHITE 4100/4101



High Build Epoxy Primers

- Faster and easier application
- Comprehensive gelcoat blister repair and prevention
- High-build formula covers in 2 coats vs the competitions 5 or 6 coats
- Exclusive low-VOC formula developed

WHAT MAKES PETTIT PROTECT DIFFERENT?

Pettit Protect uses significantly more of the waterproofing agent MICA.

MICA, at the highest concentration possible, provides excellent protection from water intrusion.

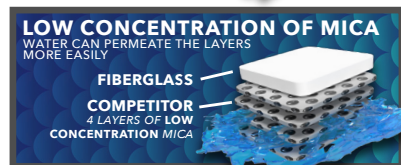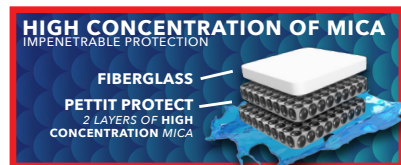


CLEANERS & DEWAXERS



Bio-Blue Hull Surface Prep 92 de-waxes, cleans, and prepares bare fiberglass for painting. Easily removes unwanted contaminants and mold release agents prior to painting. When used with 4700/4701 Pettit Protect and antifouling paint, it is part of an easy 1-2-3 system.

HOW MUCH BOTTOM PAINT DO I NEED?



STEP ONE: Calculate the square footage of the hull to be painted - multiply the length of the hull by the beam then multiply that total by .85.

STEP TWO: Divide that number (your square foot total) by the amount of coverage the selected bottom paint offers. This will give you a one-coat total.

PETTIT BOTTOM PAINT COMPATIBILITY CHART

This chart is intended as a guide only, additional preparation may be involved due to condition and age of the substrate. For additional paints or other preparation information, contact us at: 800-221-4466 or www.pettitpaint.com	EXISTING BOTTOM PAINT						
	HARD ANTIFOULING	DURABLE ABLATIVE	SOFT ABLATIVE	MODIFIED ANTIFOULING	FRESHWATER ANTIFOULING		
	Baltoplate Black Widow® Bottomkote Aqua Bottom Pro Gold! BottomShield Defense Vivid® Epoxy Cop	Sharkskin Talon Trinidad® (All) Tropikote Ultra Ultra-Kote Unepoxy (All) VC Offshore	Cukote Hydrocoat® (All) Horizons Micron® CSC Micron® Extra Micron® Optima Neptune 5 PCA Gold! Trilux 33 Ultima® SR-40 Ultima® SR-60	Ablative Plus AF-33 ACT Aqua-One Bottomkote NT CPP Micron® CF Micron® Extra	Micron® Optima Micron® WA Monterey Pacifica Plus™ Proguard Ablative Smart Solution™ Super B Ablative Ultima® Eco Armor	Biocop TF* Bottomkote Pro Micron® 99* Micron® 66* Seamate Ultima® SSA Islands 44 TF* Tropikote EX* Islands 44 Plus* Biotin Plus*	FW 21 VC 17 SR 21 VMG
NEW BOTTOM PAINT							
Black Widow® Trinidad® (All) Vivid®	SAND & APPLY	HEAVY SAND & APPLY	REMOVE	REMOVE	REMOVE		
ECO HRT® Premium HRT® Unepoxy HRT®	SAND & APPLY	LIGHT SAND & APPLY	LIGHT SAND & APPLY	SAND & APPLY	REMOVE		
Odyssey® HD Odyssey® 60 Odyssey® Triton	SAND & APPLY	LIGHT SAND & APPLY	SAND & APPLY	HEAVY SAND & APPLY	REMOVE		
Hydrocoat® Hydrocoat® ECO Neptune HRT®	LIGHT SAND & APPLY	POWER WASH & APPLY	LIGHT SAND & APPLY	SAND & APPLY	SAND & APPLY		
SR-21™	SAND & APPLY	REMOVE	REMOVE	REMOVE	CLEAN & APPLY		

*Tin copolymer paints and modified antifouling paints (SPC technology) should be sealed with a coat of 6627 Tie Coat Primer, allow to dry 4 hours and apply new antifouling paint.

This document is intended as a guide only, additional preparation may be involved due to condition and age of substrate.

*Tin copolymer paints and modified antifouling paints (SPC technology) should be sealed with a coat of 6627 Tie Coat Primer, allow to dry 4 hours and apply new antifouling paint. This document is intended as a guide only, additional preparation may be involved due to condition and age of substrate.