

## SUPERIOR MARINE GRADE FINISHING PRODUCTS



# TOPSIDE FINISHES PRODUCT AND COLOR GUIDE

800-221-4466

WWW.PETTITPAINT.COM

#### **TOPSIDE ENAMEL**



**EZ-POXY**® is a modern one-part polyurethane topside and deck enamel improved by the addition of silicone for a brilliant shine and easy brushability. Its advanced ultraviolet filters enhance the superior gloss retention and durability of polyurethane. The result is a topside finish that's exceptionally easy to apply, producing a lasting gelcoat-like brilliance with minimal effort. It is more economical, requires less effort, and is more forgiving than the competition's.

Featuring easy application, less solvent smell, fewer coats to get the job done, and competitively priced, EZ-Poxy is the go-to choice for boaters all over. Give your vessel the best in protection without the extra hassle.

**Note:** All swatch colors shown in this brochure are approximations of the actual paint color in the can.





The **EZ PRODUCT FAMILY** was developed over the course of many years, based on proven technology and focused on providing the simplest solutions to complex refinishing problems. Each EZ product is project-specific, provides exceptional value, and is geared towards turning DIY's into Pros!


Look for the "EZ" icon at the top left corner of a product!





**EZ-POXY PERFORMANCE ENHANCER 3021** is an additive that can be used in all Pettit high-gloss solvent-based topside paints and varnishes. Its advanced formulation reacts with the paint it is mixed in with, providing exceptional durability, gloss, hardness, gloss-retention, scratch resistance, and longevity. Unlike other two-part urethanes, paints catalyzed with this hardener can be applied over well adhered one-part finishes.

COMPATIBLE WITH					
EZ-POXY	EZ-DECKS	EZ-BILGE	EZ-PRIME		

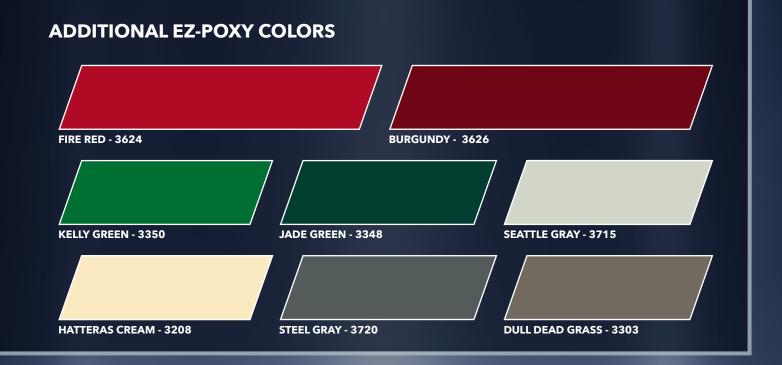

#### **SPECIFIC DUTY TOPSIDES**

ΕZ



**EZ-DECKS** is a super-tough polyurethane non-skid performance deck finish containing a polypropylene grit that produces a slip-resistant finish on all decks and cabin soles. The durable weather-resistant finish resists long-term abrasion and abuse. It's loaded with ultraviolet filters to fight against fading while offering superior color retention that will stay vibrant for years to come without worry of peeling or cracking. Compatible with **EZ-Poxy Performance Enhancer 3021**.

WHITE - 3127 OFF WHITE - 3128 PLATINUM - 3129

ΕZ



**EZ-BILGE** is a durable, high-performance alkyd finish specially formulated to withstand the abuses associated with boat bilges. The hard-wearing finish is resistant to antifreeze, grease, gasoline, diesel fuel, and engine oil. Its tough resilient surface will stand up to years of abrasion and wear. EZ-Bilge utilizes a high-solids formula that is easy to apply by brush, roller or spray.

Compatible with EZ-Poxy Performance Enhancer 3021.

WHITE - 3124

**BILGE GRAY - 3125** 

ΕZ



**EZ-CABINCOAT** is a high-performance, water-based paint specially formulated for areas such as cabins that are prone to moisture. A super-tough finish provides a moisture-resistant, mold and mildew proof surface that will stay good-looking for years. EZ-CabinCoat provides excellent adhesion to most glossy and hard-to-paint surfaces without the need for sanding. Easy application with soap and water clean-up.

WHITE - 3121

ΕZ



**EZ FABRICOAT**<sup>®</sup> is a great way to refinish stained, faded, or blemished fabric and vinyl on your boat. Give your boat new life and keep it looking its best with EZ Fabricoat. Offered in a selection of colors.

GLOSS WHITE - 3003 SATIN GRAY - 3005

SATIN DARK GRAY - 3006

SATIN DARK KHAKI - 3004

#### RUBBERIZED NON-SKID COATING



**PETTIT TUFF COAT**<sup>TM</sup> is a state-of-the-art, single component, flexible, water-based product created through a unique process of cross-linking urethanes, acrylics, co-polymers and recycled rubber granules to create a long-lasting non-skid coating. This product is designed to provide an attractive, highly durable, impact-resistant, non-slip surface for boats, yachts, decks and docks. This product can be used in areas of full submersion should such an application be desired. Pettit Tuff Coat is the perfect medium texture solution for high traffic areas where safety is a high priority, and its powerful UV filters allow the coating to be used in direct or indirect sunlight without the coating fading, peeling or breaking down.

Pettit Tuff Coat's flexible finish dries to 30-35 mils of thickness creating a finish that hides significant imperfections on all surfaces as well as improves existing non-skid finishes from boat manufacturers. This product is low odor and must be applied with a Tuff Coat textured roller or low-pressure hopper spray gun.

Pettit Tuff Coat is available in 15 attractive stocked colors to match our EZ Poxy product offering.

**Note:** All swatch colors shown in this brochure are approximations of the actual paint color in the can. Pettit Tuff Coat colors may not identically match EZ Poxy colors due to non-skid finish and texture.



#### PREP & CONDITIONING PRODUCTS

ΕZ



**EZ-TEX**® **7100** is an easy to use epoxy repair compound where a high strength, waterproof, permanent repair is needed. This unique formula creates a tenacious bond to most surfaces. Its buttery consistency will not sag or shrink and is excellent for filling cracks, gouges and voids. A 1:1 ratio makes mixing easy. EZ-Tex can be sanded, drilled, tapped, screwed, and painted once cured.

ΕZ



**EZ-WOOD SEALER 2018** is used to seal all types of raw wood prior to painting and varnishing. The sealer acts as a moisture barrier layer to prevent peeling and excessive absorption of vehicle from topside primers, paints, or varnishes. It uniformly seals and satisfies the absorbancy of all woods including teak and mahogany.

ΕZ



**EZ-FAIR EPOXY FAIRING COMPOUND 7050** is a lightweight, two-part epoxy putty designed for filling and smoothing surface imperfections above and below the waterline. The special resins used in EZ-Fair impart a high degree of water and chemical resistance to the product, making it an integral part of the Pettit Gelcoat Blister Repair System. In addition, EZ-Fair is the product of choice for fairing metal keels or any underwater surface. Available in can kits or a unique self-measuring cartridge dispenser.



**FLEXPOXY 7076** is a two-part epoxy resin that does not sag, run, or shrink. Its thick formula allows it to fill large cavities in a single application. When cured, it remains flexible making it ideal for environments that require flex such as keel joint repairs. Flexpoxy creates a superior bond to all epoxies, polyester resins, metals and wood. It can be sanded, machined, cut, filed, planed, drilled, tapped, or nailed making it perfect for filling, filleting, forming, fairing, and fastening. This low odor formula is resistant to chemicals and is safe to use above and below the waterline. Flexpoxy can be molded and shaped during application and is easily tinted with paints and stains. Flexpoxy can be over coated by most paints and stains.



**BIO-BLUE DEWAXER 92** is a powerful blend of cleaning agents and silica grit that de-waxes, etches, cleans, and prepares bare fiberglass for painting, regardless of the boat's age. This solvent-free product is designed to provide an easy and trouble-free method of removing unwanted contaminants, grease, wax, dirt, and mold release agents from fiberglass surfaces prior to painting.

#### PREP & CONDITIONING PRODUCTS

ΕZ



**EZ-PRIME** is a multi-purpose primer designed for use as a base coat whenever the surface to be painted is aged, cracked, checked, pitted, or in any way less than smooth. It can be applied to fiberglass, wood, properly etched metal, and previously painted surfaces. EZ-Prime fills imperfections, dries quickly, and is easy to sand. Compatible with **EZ-Poxy Performance Enhancer 3021**.

WHITE - 6149



**RUSTLOK® METAL PRIMER 6980** is an easy to apply, moisture and corrosion-proof primer for use on all cast iron, aluminum, and steel surfaces, including galvanized and stainless. Its water impervious barrier offers excellent adhesion and corrosion protection even over rusted surfaces. Recommended any time an easy-to-apply, anti-corrrosive barrier coat is desired.

ΕZ



#### EZ SPEED STRIP™ 125

is a powerful chemical stripper that is effective against a wide variety of marine coatings and is safe for gelcoat. Its gel consistency allows it to work on horizontal and vertical surfaces without dripping or sagging.



**120 THINNER** is the general-purpose thinner recommended for thinning and cleaning up most EZ Products.

**9900 SKIDLESS COMPOUND** creates a non-slip surface.



**ALUMAPROTECT 4400/4401** is a two-part strontium chromate primer designed to form the ideal barrier coat over roughed bare aluminum. AlumaProtect provides maximum resistance to fresh or salt water, thus eliminating corrosion. Intended to be used as a primary coat over bare aluminum hulls and outdrives.

**Note:** All swatch colors shown in this brochure are approximations of the actual paint color in the can.

#### MARINE GRADE SEALANTS



**ANCHORTECH®** marine grade sealants are built for the rigors of the marine industry and offer exceptional performance in all conditions with a user-friendly, low temperature application. AnchorTech sealants are flexible and paintable, and will not crack or shrink. AnchorTech adheres to a wide variety of substrates, allowing for incredible versatility in its use. Surfaces include fiberglass, wood, aluminum, most metals, most plastics, glass, and most common boat-building materials.



#### UV RESISTANT ADHESIVE SEALANT

- Above waterline use
- All weather, low temp application
- Excellent UV resistance, non-yellowing
- Mold and mildew resistant
- 100% waterproof
- Paintable in 1 hour
- Apply down to 20°F





## PREMIUM FAST DRY ADHESIVE SEALANT

- Above or below waterline use
- ±25% joint movement
- Maximum adhesion and flexibility
- Superior durability
- Paintable in 24 hours
- 24 hour cure time
- Apply down to 41°F



PETITI"

PETITIT

PETITIT

PETITI

PETITI

PETITI

PETITI

PETITIT

### ADVANCED HYBRID SEALANT

- Above waterline use
- All weather, low temp application
- Permanently flexible
- Shrink & crack-proof
- Mold and mildew resistant
- 100% waterproof
- Paintable in 30 minutes
- Apply down to 20°F



	UV RESISTANT	PREMIUM FAST DRY	ADVANCED HYBRID
CHARACTERISTICS	Semi-Permanent Flexible Adhesive Sealant	Permanent Flexible Adhesive Sealant	Removable Flexible Sealant
ABOVE WATERLINE USE	✓	✓	✓
BELOW WATERLINE USE		✓	
PAINTABLE	1 Hour	24 Hours	30 Minutes
RETURN TO SERVICE TIME	1 Hour	24 Hours	30 Minutes
UV RESISTANT	✓		✓
TEMPERATURE RANGE	20°F to 120°F	41°F to 100°F	20°F to 120°F
SEALING ACRYLIC WINDOWS			✓
MOLD & MILDEW RESISTANT			✓
DAMP & DRY APPLICATION	<b>√</b>	<b>√</b>	<u></u> ✓
COVERAGE	55 Linear Ft .@ 3/16" Diameter Bead	24.3 Linear Ft. @ 1/4" Diameter Bead	49 Linear Ft. @ 3/16" Diameter Bead